



## PRODUCT DATA SHEET

### PD230 DUAL CHANNEL VEHICLE DETECTOR

The PD230 is a series of dual channel inductive loop vehicle detectors in a popular miniature housing for DIN rail and relay base mounting.

Miniature single and dual channel detectors from Nortech make it unnecessary to compromise on features when selecting a detector for parking control and motorised door or gate applications.

The primary function of the detector is to detect vehicle presence by means of an inductance change caused by the vehicle passing over a wire loop buried under the road surface.

#### FEATURES

**Compact Size:** Miniature housing that saves space in newer compact equipment designs. The lightweight design makes it possible to plug the unit directly into a DIN rail compatible socket.

**Flexibility:** Front panel mounted DIL switch provides many user selected functions without the need to access the internal circuitry. Channel multiplex circuitry eliminates crosstalk interference between the two loops connected to this detector regardless of the proximity.

**Direction Logic capability:** Internal links optionally modify the outputs to indicate the direction of travel of a vehicle. Outputs are provided for direction A to B and B to A. This option is used for entry/ exit counting, free exit and similar applications.

**Selectable Permanent Presence:** With this feature selected the output of the presence relay will be maintained for an indefinite period, thereby eliminating premature barrier/gate/door closure and possible vehicle damage.

**Fault Monitor:** A fault indication is provided in the event of the loop input becoming faulty, or alternatively if the loop is out of the tuning range. This feature will help in localising the fault in the event of a maintenance call-out.



**Loop Isolation Protection:** The loop isolation transformer provides protection against lightning and transient damage and allows for operation with single point to ground sensor loops.

**Diagnostic Capabilities:** The software of this unit allows comprehensive diagnostics capabilities in conjunction with separate DU100 hand-held diagnostics readout. Advanced diagnostics features are covered by International patents.

#### APPLICATIONS

- Parking barrier control
- Rising Bollards
- Motorised gates and doors
- Industrial control systems

## TECHNICAL DATA - PD230


### Functional Specification:

Self Tuning Range:	20-1000 $\mu$ H
Extended Sensitivity:	Four step selectable per channel High - 0.01% $\Delta$ L/L Med - High 0.05% $\Delta$ L/L Med - Low 0.1% $\Delta$ L/L Low - 0.5% $\Delta$ L/L
Frequency:	Four steps adjustable on faceplate High, Med-High, Med-Low, Low (Frequency determined by loop geometry)
Output Configuration:	1 output relay per channel (fail safe in Presence mode) - Fail secure (optional model)
Pulse Output Duration:	Approx. 150ms (option 250ms)
Presence Time:	Selectable - limited or permanent presence. (Limited-presence 1 hour for 3% $\Delta$ L/L
Output Modes:	1. Presence or pulse outputs are independently selectable for CH 1 and CH2 2. Direction logic output – A to B (CH1) & B to A (CH2) pulse or presence outputs available.
(Internal selection)	
Indications:	The following faceplate indications are provided: Single power LED's plus individual channel LED's 1. Tuning-on (flashed) or slow flash in A/B logic mode 2. Undetect- LED off. 3. Detect - LED on steady 4. Fault - on with short off pulse (manual reset required to restore)
Protection:	Loop isolation transformer, zener diode clamping on loop inputs and gas discharge tube protection.
Power Reqrments:	120V AC $\pm$ 15% 48-60Hz (PD231) 230V AC $\pm$ 15% 48-60Hz (PD232) 12-24V AC/DC $\pm$ 15% (PD234) 1.5VA max @ 230V

Operating temperature range: -40°C to +70°C

### Mechanical detail:

Material:	High heat ABS blend
Dimensions:	78(H) x 41(W) x 80(L)mm
Mounting:	Shelf or DIN-rail socket
Connector:	Single rear mount 11-pin submagnal (JEDEC No. B11-88)
Option:	1 metre flying lead

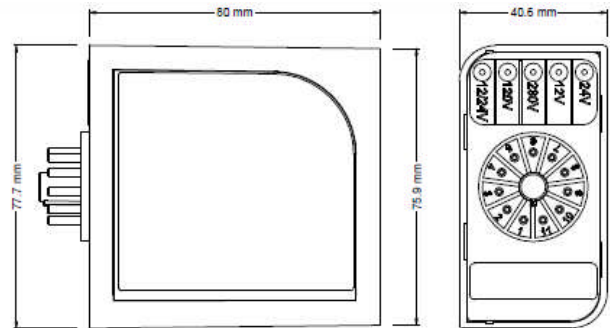

### 11-pin connector wiring

pin	designation
1	Live 230V AC 50/60 Hz
2	Neutral OR 12 - 24V AC/DC
3	CH 1 Loop   Twist this
4	CH 1 Loop   pair
5	CH 2 Loop   Twist this
6	CH 2 Loop   pair
7	CH 2 Out   Normally Open
8	CH 2 Out   Relay contacts
9	Earth
10	CH 1 Out   Normally Open
11	CH 1 Out   Relay contacts

### ORDERING INFORMATION

Part No.	Description	Voltage
302FT0026	PD232D Nortech	240 VAC
302FT0008	PD234D Nortech	12-24v AC/DC
302FT0054	PD232D Nortech N/C contacts	240 VAC
301FT0041	1 metre flying lead	option
CTR 119090	11 pin Relay Base	option